


TECHNICAL SPECIFICATIONS
Bimetal Process Thermometer Dimensions

Data Sheet DIM T PROC4

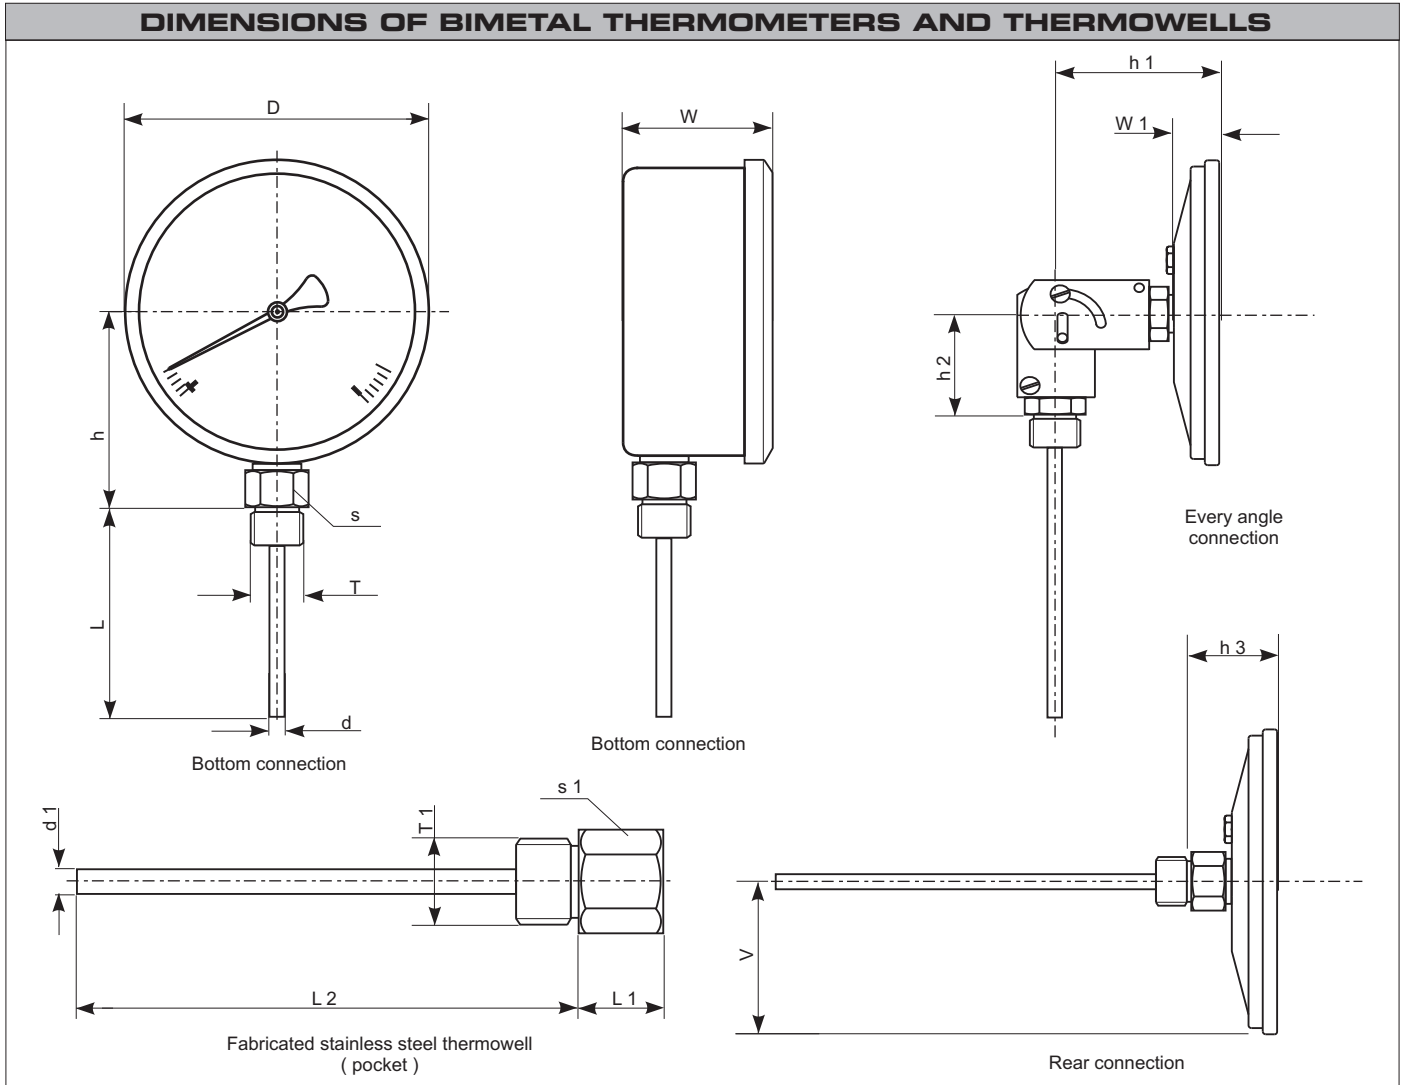

BIMETAL THERMOMETER DIMENSIONS (in mm)												Weight in kg	
Nom Case Ø	D	d	h	h1	h2	h3	L	s	T	W	W1	Dry	Glyc filled
50	58	6	N/A	N/A	NA	25	Standard lengths 65, 100, 150, 200, 250& 300mm. Non standard & other lengths up to 500mm available on request.	22 Hex	1/2" BSP / NPT Standard. Other sizes on request.	N/A	13	0.15	0.25
63	68	6	64	60	47	28		22 Hex		38	16	0.2	0.3
80	81	6	70	61	47	29		22 Hex		48	17	0.4	0.5
100	107	6	84	69	47	29		22 Hex		50	17	0.5	0.9
125	130	6	95	66	47	34		22 Hex		N/A	22	N/A	N/A
160	161	6	110	69	47	37		22 Hex		50	25	1.0	1.8

FABRICATED THERMOWELL DIMENSIONS (SOLID MACHINED ON REQUEST) (in mm)				
d1	L1	L2	s1	T1
10	25	Standard lengths: 45, 80, 130, 180, 230, 280mm Non standard lengths & other specifications on request.	27 Hex	1/2" BSP / NPT male thread standard. Other specifications on request.